


HUSILLOS

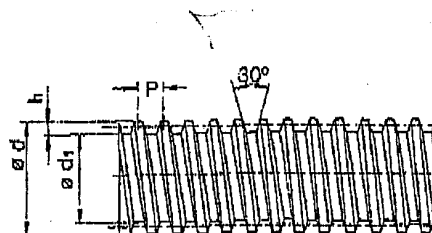


HUSILLO ROSCADO					HUSILLO LAMINADO				
REFERENCIA	Paso P	Ø Ext. d	Ø Fondo d1	Altura filete h	REFERENCIA	Paso P	Ø Ext. d	Ø Fondo d1	Altura filete h
Tr - 15/3	3	15	11,7	1,65	TrL - 14/3	3	14	10,7	1,65
Tr - 20/4	4	20	15,5	2,25	TrL - 20/4	4	20	15,5	2,25
Tr - 25/5	5	25	19,5	2,75	TrL - 24/5	5	24	18,5	2,75
Tr - 30/6	6	30	23,5	3,25	TrL - 30/6	6	30	23,5	3,25
Tr - 40/7	7	40	32,5	3,75					
Tr - 50/8	8	50	41,5	4,25					
Tr - 60/9	9	60	50,5	4,75					

MATERIAL:
Acero F. 114 (C-45)
Tolerancia paso $\pm 0,03$ mm / 300 mm

MATERIAL:
TrL - 14/3 y 20/4 Acero St - 80
TrL - 24/5 y 30/6 Acero C - 95 (F.113)
Tolerancia paso $\pm 0,07$ mm / 300 mm

TUERCAS CON BRIDA DE FIJACION




NOTA: Se suministra la tuerca completa con brida, o solamente el casquillo de bronce.

REFERENCIA		Ø d	Ø Brida D1	Ø Anclaje D2	Ø D3	Ø Casquillo D	L	B	Tal. Anclaje Para tornillo nº
PARA HUSILLO ROSCADO	TUER - 3	15	60	50	38	25	25	10	M-6 3
	TUER - 4	20	70	55	42	30	30	12	M-6 4
	TUER - 5	25	80	65	52	35	37	12	M-6 4
	TUER - 6	30	100	82	65	45	45	16	M-8 4
	TUER - 7	40	110	93	75	55	60	16	M-8 6
	TUER - 8	50	135	113	90	65	75	18	M-10 6
PARA HUSILLO LAMINADO	TUER - 3L	14	60	50	38	25	25	10	M-6 3
	TUER - 4L	20	70	55	42	30	30	12	M-6 4
	TUER - 5L	24	80	65	52	35	37	12	M-6 4
	TUER - 6L	30	100	82	65	45	45	16	M-8 4


MATERIAL:
Brida acero F.112 - Casquillo roscado Bronce S-3 (7,5 % Sn)

TUERCAS PARA HUSILLO LAMINADO

Tuercas redondas



Tuercas exagonales



REDONDAS				EXAGONALES			
REFERENCIA	Ø d	Ø D	L	REFERENCIA	Ø d	SW	L
KSM - 3	14	30	21	SKM - 3	14	22	21
KSM - 4	20	45	30	SKM - 4	20	30	30
KSM - 5	24	50	36	SKM - 5	24	36	36
KSM - 6	30	60	45	SKM - 6	30	46	45

MATERIAL: Acero

This fax was received by GFI FAXmaker fax server. For more information, visit: <http://www.gfi.com>